

Date:	26.04.2010	Sign: sss
Last Rev:	19.10.2011	Sign: sss
Doc. No:	K3-10/54dE	Control: ps
Page 1 of 9		

Reinforcement design for TSS 101

CONTENTS

PART 1 – BASIC ASSUMPTIONS.....	2
GENERAL.....	2
STANDARDS	2
QUALITIES	3
DIMENSIONS.....	3
LOADS	3
PART 2 - REINFORCEMENT	4
EQUILIBRIUM.....	4

Date:	26.04.2010	Sign: sss
Last Rev:	19.10.2011	Sign: sss
Doc. No:	K3-10/54dE	Control: ps
Page 2 of 9		

Reinforcement design for TSS 101

PART 1 – BASIC ASSUMPTIONS

GENERAL

The following calculations of anchorage of the units and the corresponding reinforcement must be considered as an example illustrating the design model.

It must always be checked that the forces from the anchorage reinforcement can be transferred to the main reinforcement of the concrete components. The recommended reinforcement includes only the reinforcement necessary to anchor the unit to the concrete.

In the vicinity of the unit the element must be designed for the force R_1 .

STANDARDS

The calculations are carried out in accordance with:

- Eurocode 2: Design of concrete structures. Part 1-1: General rules and rules for buildings.
- Eurocode 3: Design of steel structures. Part 1-1: General rules and rules for buildings.
- Eurocode 3: Design of steel structures. Part 1-8: Design of joints.
- EN 10080: Steel for the reinforcement of concrete. Weldable reinforcing steel. General.

For all NDPs (Nationally Determined Parameter) in the Eurocodes the recommended values are used.

NDP's are as follows:

Parameter	γ_c	γ_s	α_{cc}	α_{ct}	$C_{Rd,c}$	v_{min}	k_1
Recommended value	1.5	1.15	1.0	1.0	0.12	$0.035k^{1/3} \cdot f_{ck}^{1/2}$	0.15

Table 1: NDP-s in EC-2.

Parameter	γ_{M0}	γ_{M1}	γ_{M2}
Recommended value	1.0	1.0	1.25

Table 2: NDP-s in EC-3.

Date:	26.04.2010	Sign: sss
Last Rev:	19.10.2011	Sign: sss
Doc. No:	K3-10/54dE	Control: ps
Page 3 of 9		

Reinforcement design for TSS 101

QUALITIES

Concrete grade C35/45:

$$f_{ck} = 35,0 \text{ MPa}$$

EC2, Table 3.1

$$f_{cd} = \alpha_{cc} \cdot f_{ck} / \gamma_c = 1 \cdot 35 / 1,5 = 23,3 \text{ MPa}$$

EC2, Pt.3.15

$$f_{ctd} = \alpha_{ct} \cdot f_{ctk,0,05} / \gamma_c = 1 \cdot 2,20 / 1,5 = 1,46 \text{ MPa}$$

EC2, Pt.3.16

$$f_{bd} = 2,25 \cdot \eta_1 \cdot \eta_2 \cdot f_{ctd} = 2,25 \cdot 0,7 \cdot 1,0 \cdot 1,46 = 2,3 \text{ MPa}$$

EC2, Pt.8.4.2

Reinforcement B500C:

$$f_{yd} = f_{yk} / \gamma_s = 500 / 1,15 = 435 \text{ MPa}$$

EC2, Pt.3.2.7

Structural steel S355:

Tension: $f_{yd} = f_y / \gamma_{M0} = 355 / 1,0 = 355 \text{ MPa}$

Compression: $f_{yd} = f_y / \gamma_{M0} = 355 / 1,0 = 355 \text{ MPa}$

Shear: $f_{sd} = f_y / (\gamma_{M0} \cdot \sqrt{3}) = 355 / (1,0 \cdot \sqrt{3}) = 205 \text{ MPa}$

DIMENSIONS

Inner tube: HUP 100x50x6, Cold formed, S355

Outer tube: HUP 120x60x4, Cold formed, S355

LOADS

Vertical ultimate limit state load = $F_v = 100 \text{ kN}$.

Date:	26.04.2010	Sign: sss
Last Rev:	19.10.2011	Sign: sss
Doc. No:	K3-10/54dE	Control: ps
Page 4 of 9		

Reinforcement design for TSS 101

PART 2 - REINFORCEMENT

EQUILIBRIUM

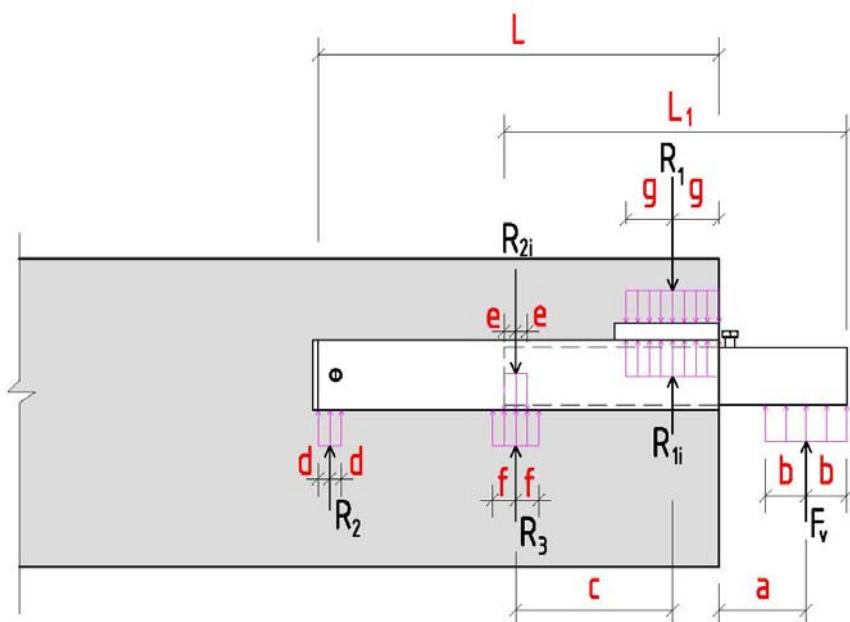


Figure 1: Forces acting on the unit.

F_v = External force on the inner tube

R_{1i} , R_{2i} = Internal forces between the inner and outer tubes.

R_1 , R_2 , R_3 = Support reaction forces the outer tube.

g = distance to the middle plane of the anchoring stirrups in front of the unit.

Date:	26.04.2010	Sign: sss
Last Rev:	19.10.2011	Sign: sss
Doc. No:	K3-10/54dE	Control: ps
Page 5 of 9		

Reinforcement design for TSS 101

I) Equilibrium inner tube:

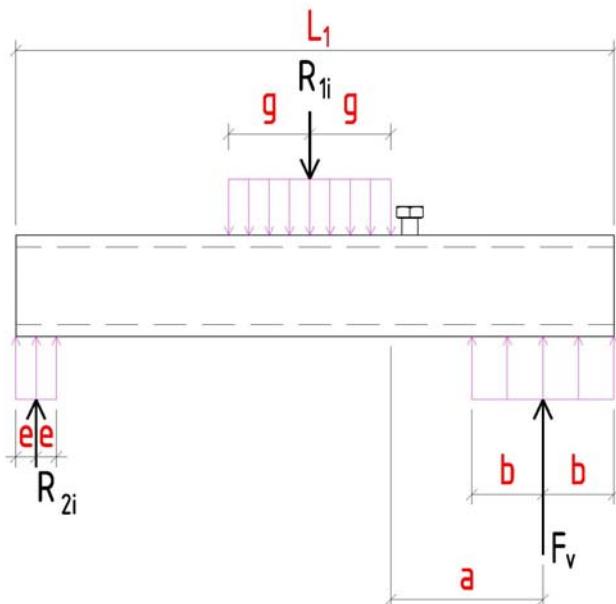


Figure 2: Forces acting on the inner tube.

Equilibrium equations of the inner tube:

$$1): \sum M = 0: F_v \cdot (L_1 - b - e) - R_{1i} \cdot (L_1 - b - a - g - e) = 0 \quad (1)$$

$$2): \sum F_y = 0: F_v - R_{1i} + R_{2i} = 0 \quad (2)$$

Assuming nominal values:

$L_1 = 295\text{mm}$, $a = 75\text{mm}$, $b = 35\text{mm}$, $g = 40\text{mm}$, $e = 10\text{mm}$

Solving R_{1i} from eq. 1:

$$R_{1i} = \frac{F_v \cdot (L_1 - b - e)}{(L_1 - b - a - g - e)} \quad (3)$$

Solving R_{2i} from eq. 2:

$$R_{2i} = R_{1i} - F_v \quad (4)$$

Results:

$$R_{1i} = \frac{100\text{kN} \cdot (295 - 35 - 10)\text{mm}}{(295 - 35 - 75 - 40 - 10)\text{mm}} = 185.2\text{kN}$$

$$R_{2i} = 185.2\text{kN} - 100\text{kN} = 85.2\text{kN}$$

Date:	26.04.2010	Sign: sss
Last Rev:	19.10.2011	Sign: sss
Doc. No:	K3-10/54dE	Control: ps
Page 6 of 9		

Reinforcement design for TSS 101

II) Equilibrium outer tube:

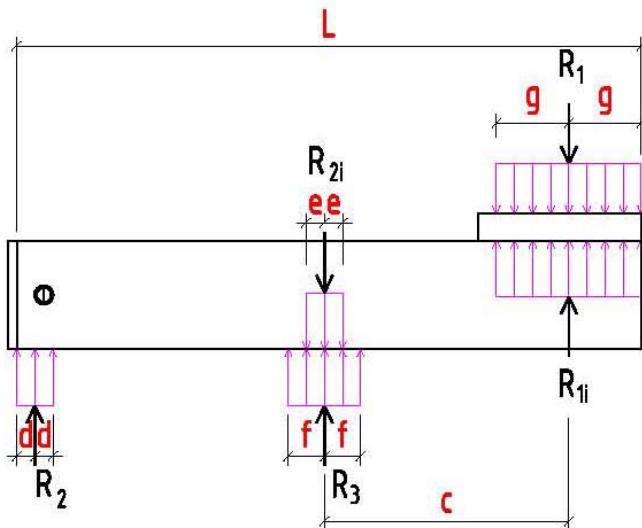


Figure 3: Forces acting on the outer tube.

Exact distribution of forces depends highly on the behavior of the outer tube. Both longitudinal bending stiffness and local transverse bending stiffness in the contact points between the inner and the outer tubes affects the equilibrium. Two situations are considered:

1) Rigid outer tube.

Outer tube rotates as a stiff body. This assumption gives minimum reaction force at R₁, and maximum reaction force at R₂. R₃ becomes zero. (The force R₃ will actually be negative, but since no reinforcement to take the negative forces is included at this position, it is assumed to be zero.)

Equilibrium equations of the outer tube:

$$1): \sum M = 0: (R_{1i} - R_1) \cdot (L - g - d) - (R_{2i} - R_3) \cdot (L - g - c - d) = 0 \quad (5)$$

$$2): \sum F_y = 0: R_2 + R_3 + R_{1i} - R_{2i} - R_1 = 0 \quad (6)$$

Assuming nominal values:

L=345mm, c=135mm, g=40mm, e=10mm, d=10mm ; (c=L₁-b-a-g-e=295-35-75-40-10=135mm, see Figure 1)

Solving R₁ from eq. 5:

$$(R_{1i} - R_1) \cdot (L - g - d) - (R_{2i} - R_3) \cdot (L - g - c - d) = 0$$

$$(185.2 - R_1) \cdot (345 - 40 - 10) - (85.2 - 0) \cdot (345 - 40 - 135 - 10) = 0$$

$$54634 - 295R_1 - 13632 = 0$$

$$R_1 = \frac{41002}{295} = 139kN$$

Solving R₂ from eq. 6:

Date:	26.04.2010	Sign: sss
Last Rev:	19.10.2011	Sign: sss
Doc. No:	K3-10/54dE	Control: ps
Page 7 of 9		

Reinforcement design for TSS 101

$$R_2 = R_1 + R_{2i} - R_{1i} - R_3 = 139 + 85.2 - 185.2 = 39kN$$

2) Outer tube without bending stiffness. No forces transferred to outer tube at the back of inner tube.

This assumption gives maximum reaction forces R_1 and R_3 . R_2 becomes zero. The forces follow directly from the assumption: $R_1 = R_{1i}$, $R_3 = R_{2i}$ and $R_2 = 0$

$$R_1 = 185.2kN$$

$$R_2 = 0kN$$

$$R_3 = 85.2kN$$

The magnitude of the forces will be somewhere in between the two limits, and the prescribed reinforcement ensures integrity for both situations. Reinforcement is to be located at the assumed attack point for support reactions.

Reinforcement for R_1 , R_2 and R_3 :

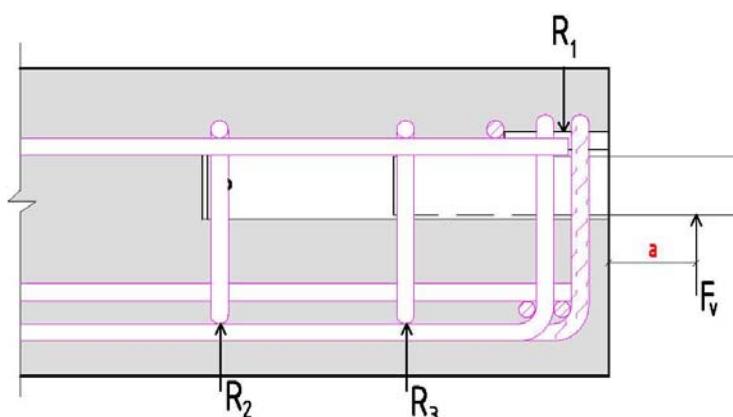


Figure 4: Forces.

Reinforcement necessary to anchor the unit to the concrete:

$$\text{Reinforcement } R_1: A_{s1} = R_1/f_{sd} = 185.2kN/435MPa = 426 \text{ mm}^2$$

$$\text{Select } 2-\varnothing 12 = 2 \times 2 \times 113 = 452 \text{ mm}^2$$

$$\text{Capacity selected reinforcement: } R = 452 \text{ mm}^2 \cdot 435 \text{ MPa} = 196.6 \text{ kN}$$

$$\text{Reinforcement } R_3: A_{s3} = R_3/f_{sd} = 85.2kN/435MPa = 196 \text{ mm}^2$$

$$\text{Select } 1-\varnothing 12 = 1 \times 2 \times 113 = 226 \text{ mm}^2$$

$$\text{Capacity selected reinforcement: } R = 226 \text{ mm}^2 \cdot 435 \text{ MPa} = 98.3 \text{ kN}$$

$$\text{Reinforcement } R_2: A_{s2} = R_2/f_{sd} = 39kN/435MPa = 89 \text{ mm}^2$$

$$\text{Select } 1-\varnothing 12 = 1 \times 2 \times 113 = 226 \text{ mm}^2$$

$$\text{Capacity selected reinforcement: } R = 226 \text{ mm}^2 \cdot 435 \text{ MPa} = 98.3 \text{ kN}$$

Date:	26.04.2010	Sign: sss
Last Rev:	19.10.2011	Sign: sss
Doc. No:	K3-10/54dE	Control: ps
Page 8 of 9		

Reinforcement design for TSS 101

Tolerances on the positioning of the reinforcement:

Due to the small internal distances, the magnitude of the forces will change when changing the position of the reinforcement. Thus, strict tolerances are required.

Alt 1) Assume:

$$L_1 = 295\text{mm}, a = 75\text{mm}, b = 35\text{mm}, g = 40+5 = 45\text{mm}, e = 10\text{mm}$$

Gives:

$$R_1 = \frac{100kN \cdot (295 - 35 - 10)\text{mm}}{(295 - 35 - 75 - 45 - 10)\text{mm}} = 192.3kN$$

$$R_2 = 192.3kN - 100kN = 92.3kN$$

Alt 2) Assume:

$$L_1 = 295\text{mm}, a = 75\text{mm}, b = 35\text{mm}, g = 40-5 = 35\text{mm}, e = 10\text{mm}$$

Gives:

$$R_1 = \frac{100kN \cdot (295 - 35 - 10)\text{mm}}{(295 - 35 - 75 - 35 - 10)\text{mm}} = 178.6kN$$

$$R_2 = 178.6kN - 100kN = 178.6kN$$

Alt 3) Assume:

$$L_1 = 295\text{mm}, a = 75\text{mm}, b = 35\text{mm}, g = 40\text{mm}, e = 10-5 = 5\text{mm}$$

Gives:

$$R_1 = \frac{100kN \cdot (295 - 35 - 5)\text{mm}}{(295 - 35 - 75 - 40 - 5)\text{mm}} = 182.1kN$$

$$R_2 = 182.1kN - 100kN = 82.1kN$$

Alt 4) Assume:

$$L_1 = 295\text{mm}, a = 75\text{mm}, b = 35\text{mm}, g = 40\text{mm}, e = 10+5 = 15\text{mm}$$

Gives:

$$R_1 = \frac{100kN \cdot (295 - 35 - 15)\text{mm}}{(295 - 35 - 75 - 40 - 15)\text{mm}} = 188.5kN$$

$$R_2 = 188.5kN - 100kN = 88.5kN$$

Date:	26.04.2010	Sign: sss
Last Rev:	19.10.2011	Sign: sss
Doc. No:	K3-10/54dE	Control: ps
Page 9 of 9		

Reinforcement design for TSS 101

Alt 5) Assume:

$$L_1 = 295\text{mm}, a = 75\text{mm}, b = 35\text{mm}, g = 40 + 5 = 45\text{mm}, e = 10 + 5 = 15\text{mm}$$

Gives:

$$R_1 = \frac{100kN \cdot (295 - 35 - 15)\text{mm}}{(295 - 35 - 75 - 45 - 15)\text{mm}} = 196kN$$

$$R_2 = 196kN - 100kN = 96kN$$

Conclusion tolerances: Alt 5 represents the most unfavorable position of reinforcement allowed without exceeding the reinforcement capacity. Thus, the assembling tolerances for P1, P2 and P4 should be $\pm 5\text{mm}$. For recommended reinforcement pattern, see Memo 55d.

Transverse reinforcement:

- One transverse bar with the same diameter as the anchorage bar to be placed in the bend of every anchoring bar.

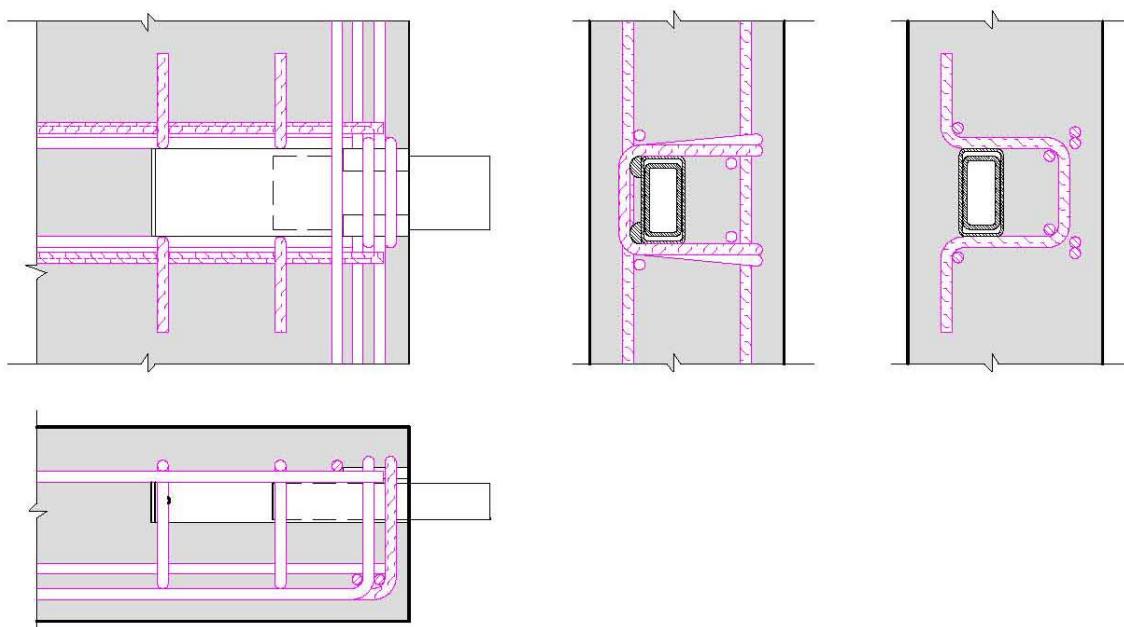


Figure 5: Anchoring reinforcement.