



FRAMING CONFIGURATION – Blocking/Nogging

Modified on: Thu, 7 Jan, 2021 at 8:12 PM


Framing Configuration may be found in two locations:

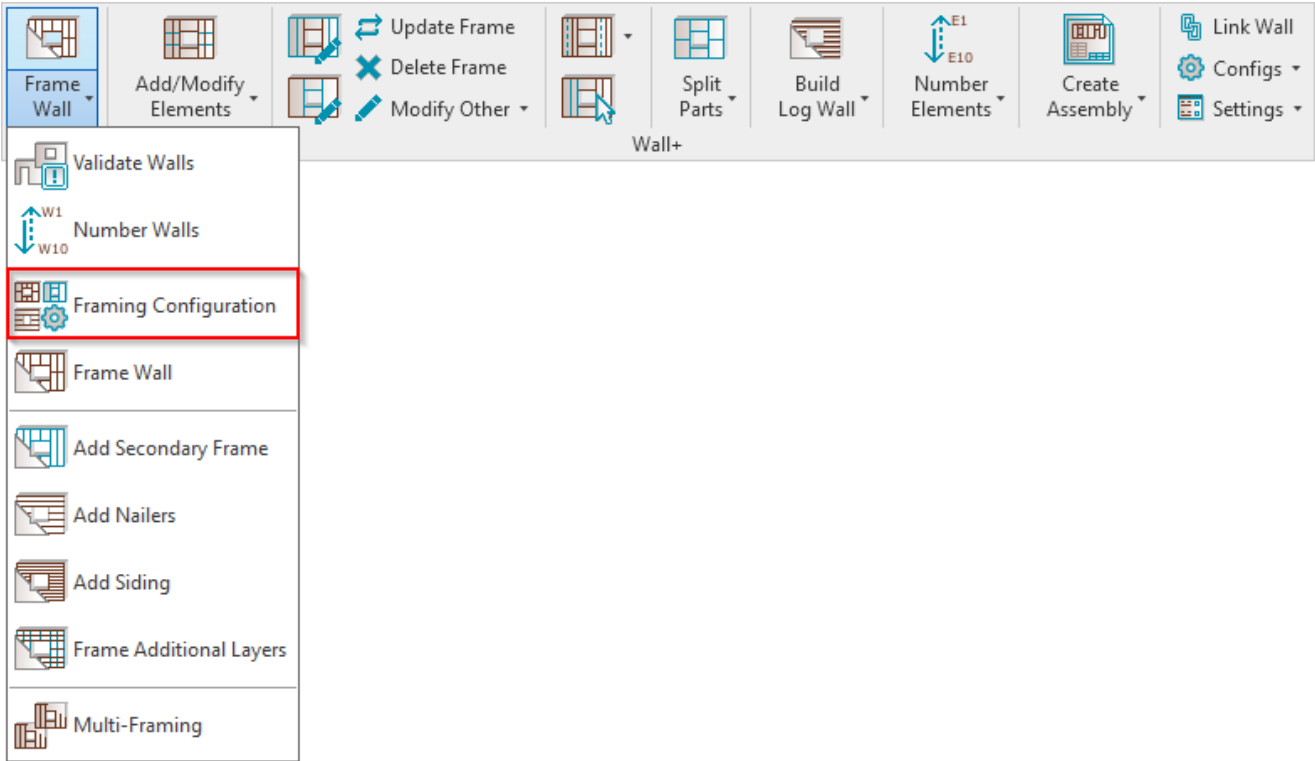

OR:

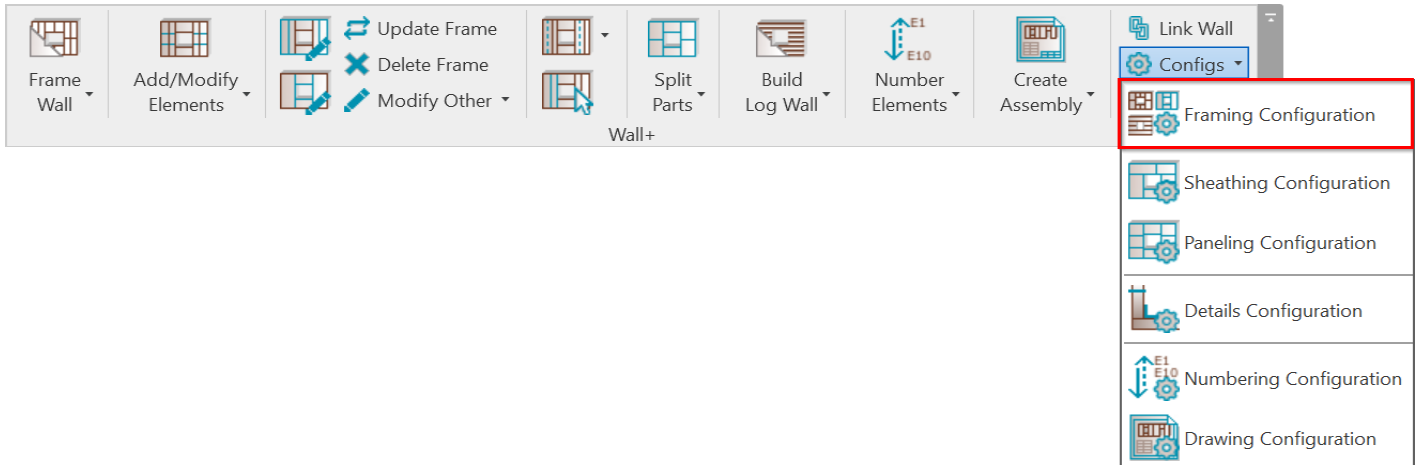

You can add different types of continuous or non-continuous **Bridging**, **Nogging** or **Blocking** into framing using different rules.

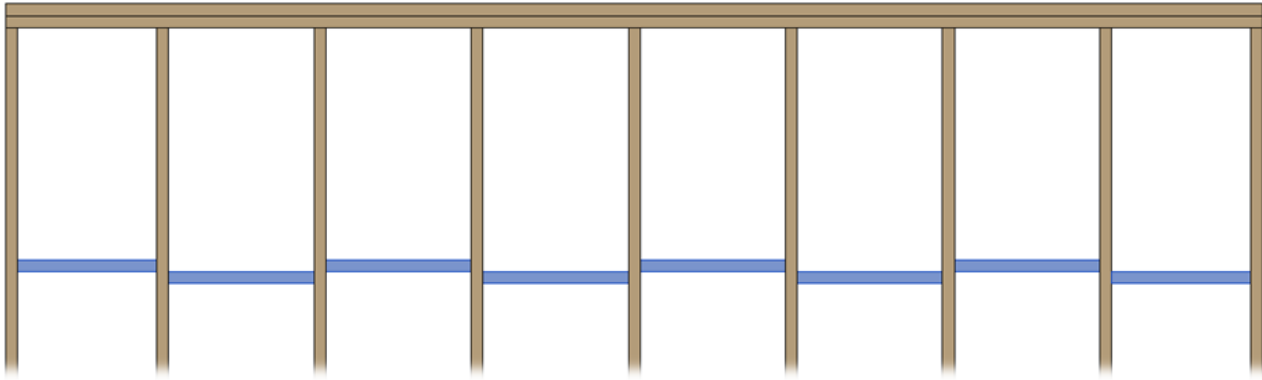

Wall+. Default Framing Parameters

Material Class: Wood
Configuration Type: Frame
Configuration Name: Frame

Save Save As... Rename Delete

B/N/B B/N/B - II B/N/B - III B/N/B - IV B/N/B - V B/N/B - VI B/N/B - VII B/N/B - VIII

End Connection
V Connection
T Connection
Ridge Stud
Blocking/Nogging
Secondary Stud
Brace
Stud Holes

Description
Apply B/N/B
Apply by Wall Type Always
Use Short Noggings
Diagonal Placement None
Align with Project Base Point
Splits Secondary Studs/Joists
Place as Siding

Custom Join
Configuration
Predefined Layout Name: *Nogging* Save to Database Duplicate Rename Delete
Select Layout from Database Configuration: -- Select -- Link with Config
New Item Remove Item Move Up Move Down

	X-Position	Count	Type	Define Depth...	Rotate 90°	Rotate 180°	F
1	Center	1	M_WF Plate : LMBR 45x120	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F

Symbolic Preview

Save Close

Read more about every feature here >> (<https://agacad.freshdesk.com/support/solutions/articles/44002140167-framing-configuration-%E2%80%93-blocking-nogging>).